



10. Pneumatic push in tube fittings

Applicable medium: Compressed Air
 Body materials: Brass and POM
 Seal materials: NBR
 Working pressure: 0~1.0MPa.
 Working temperature: -5~70
 Available color for the button: Red, Blue, Black, Green



10.1 METRIC SIZE-R(PT)THREAD TYPE

				
1.PC Male straight	2.POC Hex.Holed Straight	3.PL Male elbow	4.PLL Male Long Elbow	5.PLF Female elbow
				
6.PLM Bulkhead Elbow	7.PCF Female Straight	8.PB Branch Tee	9.PBF Female Tee	10.PD Run Tee
				
11.PX Run Y	12.PKB Branch Triple	13.PKD Reduced Branch Triple	14.PH Single Banjo	15.PHF Connector Banjo
				
16.PMF Bulkhead Female Straight	17.PU Union Straight	18.PV Union Elbow	19.PE Union Tee	20.PY Union Y
				
21.PG Unequal Union Straight	22.PEG Diff.Diam Union Tee	23.PGE Diff.Diam Union Tee	24.PW Diff.Diam Union Y	25.PJ Reducer



10.2 METRIC SIZE-G THREAD TYPE




10.3 INCH SIZE-NPT THREAD TYPE



10.4 PNEUMATIC MINI TYPE PUSH IN FITTINGS



10.5 THROTTLE VALVE

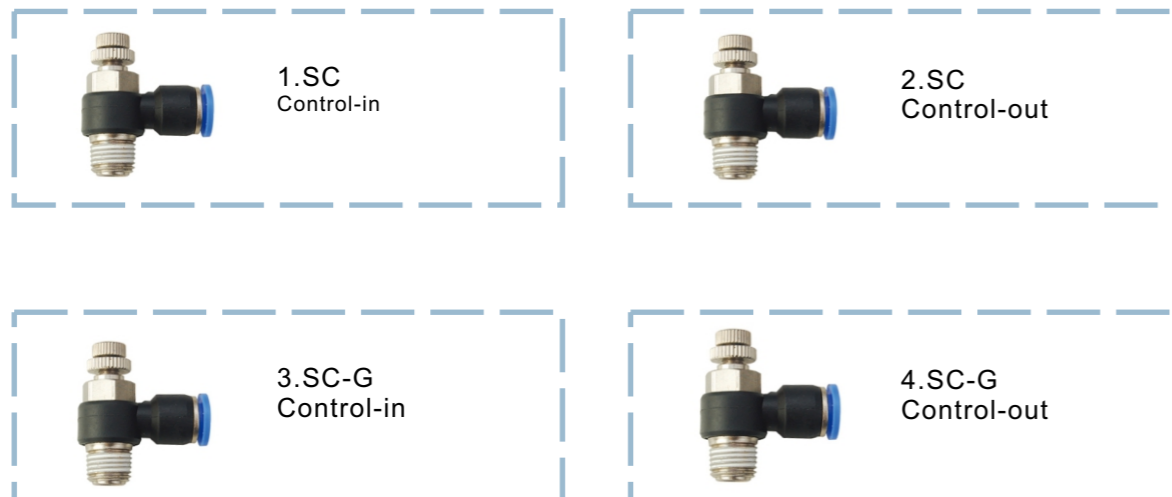

10.6 HAND VALVES



10.7 Pneumatic Muffler

